


# SPY-LECT-CART-C1502 ( 3604009 )

## MANUAL

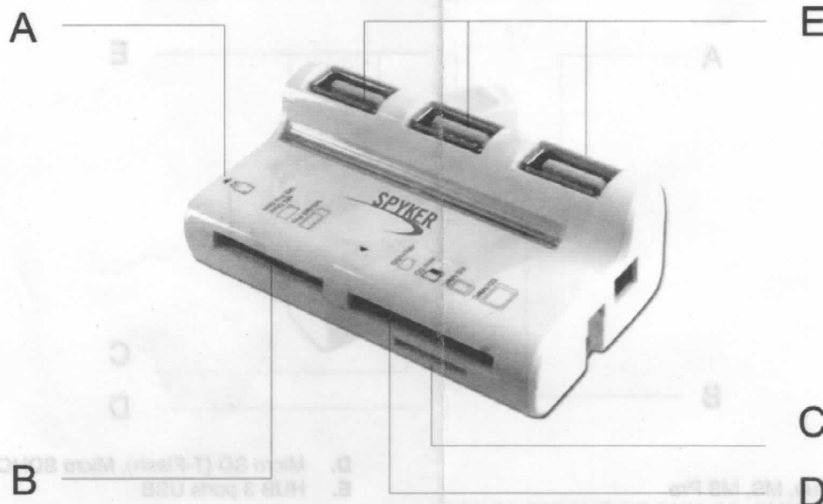

### \* Description

Support USB 2.0

High speed transmission port,transfers rate is up to 480Mbps

Compatible USB1.1 standard port downwards

4 card insertion ports + 3 ports hub. Only one disk signs display, so cannot exchange data directly between all kinds of memory cards

### \*Support memory card's types:

A: M2

B: MS Duo, MS Pro Duo, MS, MS Pro

C: SD/MMC/DV-MMC, RS-MMC, RS-DV-MMC, Mini SD

D: Micro SD (T-Flash)

Support SDHC and Micro SDHC

E: 3 Ports HUB

### \* Specification

Product size: 50(L)×30(W)×26(H)mm

Product weight: 60g

Material: Plastic

Working temperature: -20°C to +65 °C

Humidity: 20% RH to 85% RH

### \*System requirements:

Windows ME/2000/XP/Vista/ MAC OS9.2 and Later Versions